

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 16 TOWNSHIP 16 RANGE 5

DATE: 2-13-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-23-01

IN. S.P.C. E ZONE NAD '83

NAME: 16051602

N: 509922.7920(m)

E: 73023.9980(m)

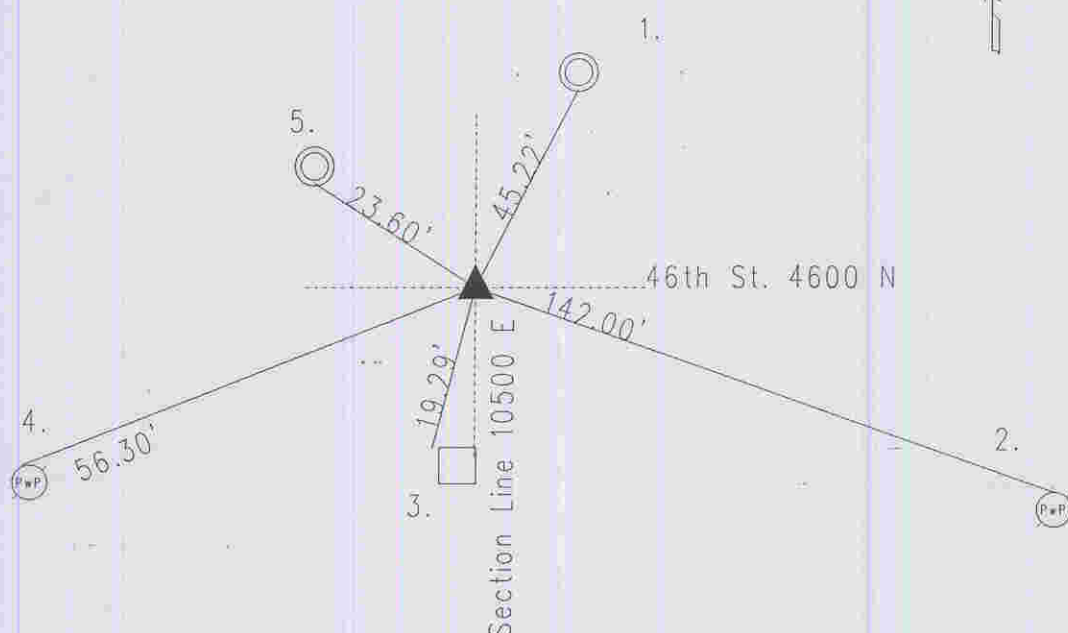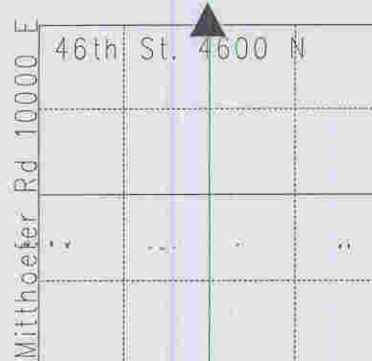

Original post set 1820 by Hendricks with witness: 24" oak S 50 E 20 links, 7" Hickory N 29 W 20 links per Marion County Atlas pg. 15. Stone set 1882 per Bell with witness: 8" elm N 58 W 41 links, 10" oak S 49 E 12 links. 7-7-56 Monroe dug corner and found stone 5" down. 11-5-70 McLand dug and found stone 5" down. 6-25-76 Hiselman called a PK nail. 5-18-90 excavated and a railroad spike found at surface. No stone found probing 36" down. Harrison set. Re-tied 10-4-94 by Kiste. Re-tied 5-16-00 by Wilcoxon. Re-tied 2-13-06 by Wilcoxon.

16051602

REF.	DISTANCE	DESCRIPTION
1.	45.22'	Cut 'x' S edge of sewer manhole rim
2.	142.00'	Road nail N PwP#78-381 D ~18" up...
3.	19.29'	NW corner of concrete fence post 10" up
4.	56.30'	Road nail N PwP#36-381 C 10" up
5.	23.60'	Cut 'x' in center of sewer manhole